


# CLAP 2014

Design Patricia Urquiola

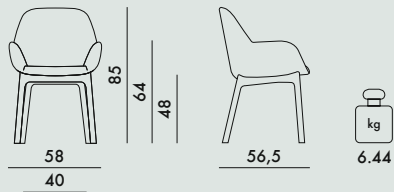

## FRAME

Mass-dyed thermoplastic technopolymer

## SEAT

Fabric-covered polyurethane

### 4182

Embossed fabric



### Fire tested version

IT UNI 9175, EN1021 fire reaction test class 1 IM ministerial certification  
MI1848D20D11M00018

US - California Standard TB 117 - UK Standard BS 7176 Medium Hazard - S.I. 1324

### 4182



### 4180




TC  
Customer  
fabric

In order to better satisfy the needs of common areas, Clap is also available in a personalised version with fabrics provided by the client, for orders of at least 4 items.

Dimensions of customised fabric to cover a single piece: 140x125 cm.

EN 1022:2005	Compliant
EN 16139:2013	Compliant
EN 1728:2012	level attained
6.4	(maximum level) L2
6.5	(maximum level) L2
6.6	(maximum level) L2
6.10	(maximum level) L2
6.11	(maximum level) L2
6.15	(maximum level) L2
6.16	(maximum level) L2
6.17	(maximum level) L2
6.18	(maximum level) L2
6.20	(maximum level) L2
6.24	(maximum level) L2
6.25	(maximum level) L2
6.26	(maximum level) L2



<b>4180/4182</b>	1	6.15	0.161	54X49X61
	1	3.97	0.120	51X51X46